

### Installation instructions Grossman GR-0090

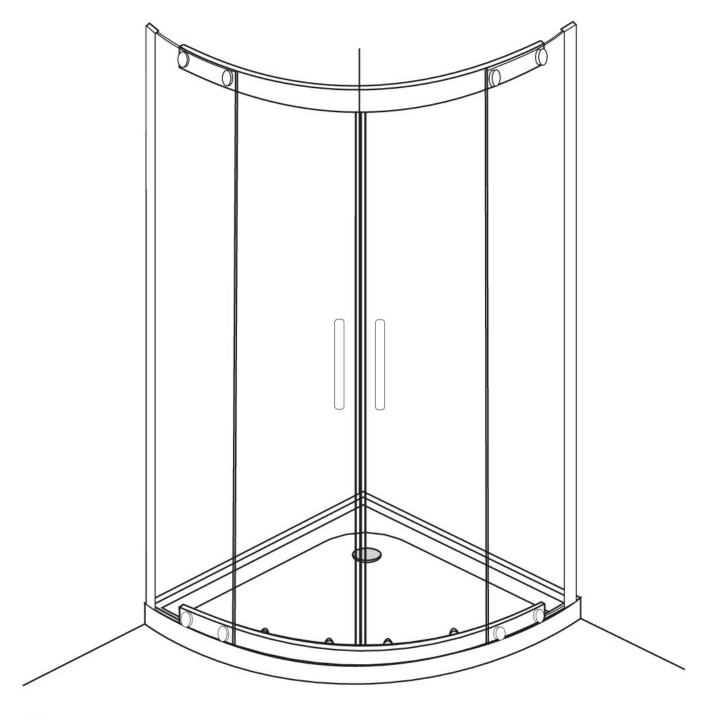

Grossman.su - продажа, установка 8(495)972-80-69

SIZE:900mmX900mmX1900mm

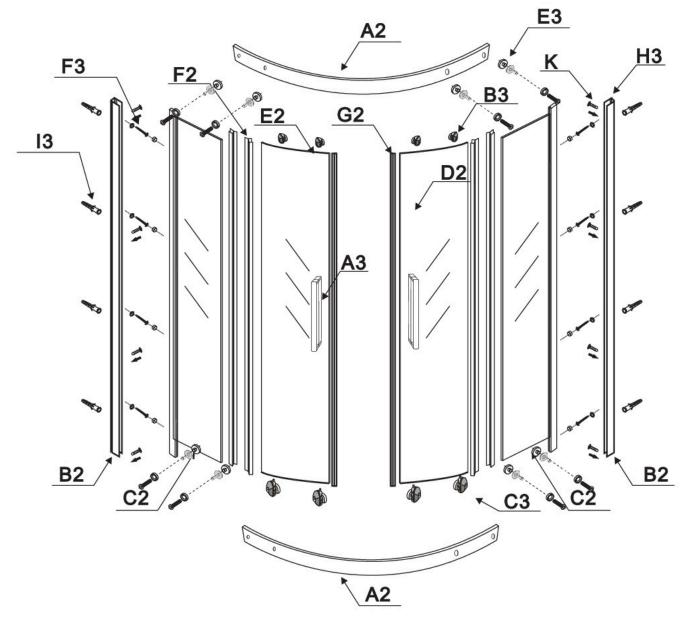

Ref	Description	Qty
A2	TOPAND BOTTOM RAILS	2
B2	B2 WALL PROFILE	
C2	SIDE PANEL	2
D2	RIGHT HAND DOOR	1
E2	E2 LEFTHAND DOOR	
F2	F2 VERTICAL SEAL	
G2 MAGNETIC DOOR SEAL		2

Ref	Description	Illustration	Qty
А3	handle		2
ВЗ	top roller	<b>6</b>	4
СЗ	bottom roller	<b>(P</b> )	4
E3	glass clip	@@······ <b>0</b> ==	8
F3	stainless steel screws: 4*25	(hame-	8
13	expandable wall plug	0.>==	8
J3	Drill bit 3mm		1
K	stainless steel screws: 4*12	Q <sub>i</sub>	8


#### Installation instructions

#### TOOLS REQUIRED(NOT SUPPLIED)

When you're ready to start, make sure that you have the parts listed and the following tools to hand, plenty of space and a clean dry area for assembly.

Two people are needed. Please note: although these instructions are comprehensive, we always recommend that a technically competent installer should undertake installation.



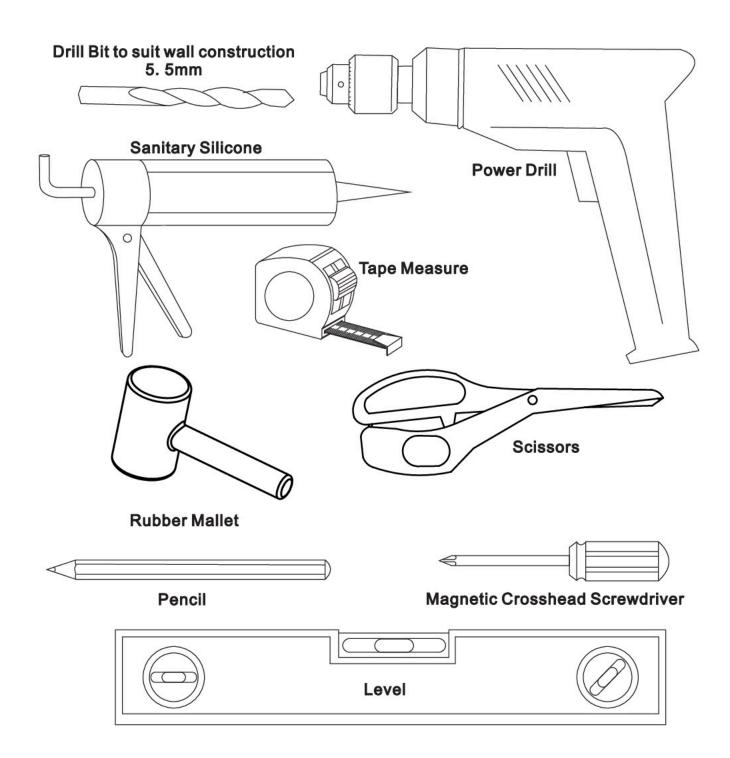

#### PRE-INSTALLATION AND TECHNICAL REQUIREMENTS


- All dimensions are shown in millimeters, except where otherwise indicated. -Ensure that the enclosure set is fitted to a level floor and vertical wall surface
- -This instruction manual is applicable for both pre-tiled wall and plain walls. 10mm distance is reserved for tiling of plain walls..
- Please note: The wall fixings included with this product are suitable for solid walls only. Plasterboard or stud walls may require specialist fixings (not supplied).
- Due to the possibility of residual spray, the area around the outside of the shower tray should be tiled, or made otherwise water resistant.
- For domestic use only
- Ensure that the mounting surface is sound, clean and dry before the enclosure is installed
- Always ensure that the product is securely installed before use
- The thickness of the tiles used will affect the overall position of the enclosure on the shower tray
- When working near a bath or shower tray ensure that the waste is covered so that small parts do not fall down it
- When drilling through ceramic tiles use a specialist drill bit
- CAUTION: DO NOT over tighten the fixings otherwise it may damage the product
- Do not strike the glass with hard or pointed items
- Do not attempt to cut the glass
- IMPORTANT RETAIN THIS INFORMATION FOR FUTURE REFERENCE: READ CAREFULLY
- WARNING: Failure to follow these instructions may result in personal injury, damage to the product and property damage

#### IMPORTANT SAFETY NOTES


- THE GLASS IS RETAINED IN THE PROFILES TO A DEPTH OF 10MM. under no circumstance should it be attempted to drill through the profiles in this region. Damage to the glass and injury may occur
- Please handle all glass with care, avoiding knocks and shock loading to all sides and edges.
   Safety glass cannot be reworked.
- Care should be taken when drilling into walls to avoid hidden pipes or electrical cables.

#### AFTERCARE INSTRUCTIONS

- Soap and water will be adequate to clean the glass a glass cleaner can be used if required.osit
  is allowed to build up it becomes increasingly difficult to remove and looks unsightly. Regular
  cleaning will minimise this effect.
- Regularly check moving parts such as rollers and hinges to ensure they are secure and adjusted correctly.
- Tighten and adjust where required. Also check all sealed joints to ensure seal has not deteriorated. Re-seal if required.



### Installation instructions 8(495)972-80-69

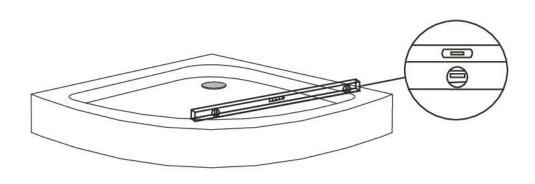

Lift the rear part of bottom basin, and then insert one end of the pipe into the drainage hole

